B-Fix® Decking & cladding solutions

B-fix One & B-fix Black-One

Manufactured in Stainless Steel, this system ensures optimal attachment. Because of its simplicity, it saves valuable time when installing. Placed on millions of m² and tested on many natural and synthetic boards, it is the ideal partner for your decks and cladding.

Characteristics

- high finish level, invisible
- quick and easy installation: 40% time savings
- respects wood movement: «spring effect»
- local disassembly possible
- usable with 3 different profiles
- installation on decks and siding
- reinforced stainless steel self-drilling screws
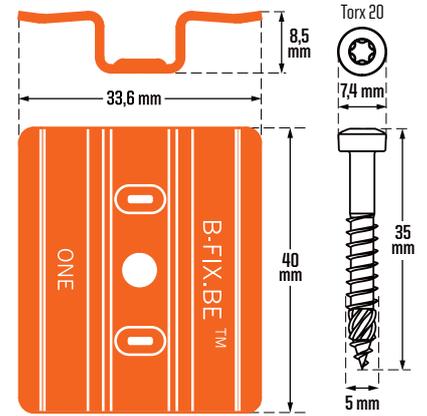- specialist approved
- patented system
- made in Belgium

WWW.B-FIX.COM

B-Fix® - Patent IP 1.452.665

Black 100x 100x 1x

One 100x 100x 1x

+/- 1,9 kg

100 mm → +/- 4,5 m²
140 mm → +/- 6 m²

33,6 mm
8,5 mm
40 mm
Torx 20
7,4 mm
35 mm
5 mm
ONE
B-FIX.BE ™

Profiles
3 compatible profiles

B-Fix Classic

B-Fix Plus

B-Fix Premium

Recommended material

wood thickness:
20 mm min.
28 mm max.

max. width: 160 mm

joist spacing:
40 cm

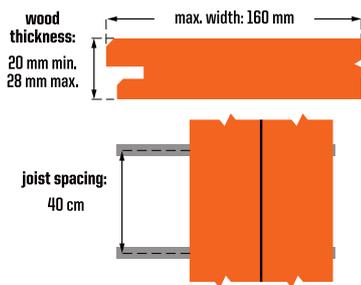## Butting: B-Fix Connect & Connect Black

Materials

B-Fix One: 301 Stainless Steel
B-Vis: A2 stainless steel + silver coating

B-Fix Black-One: 301 stainless steel + black coating
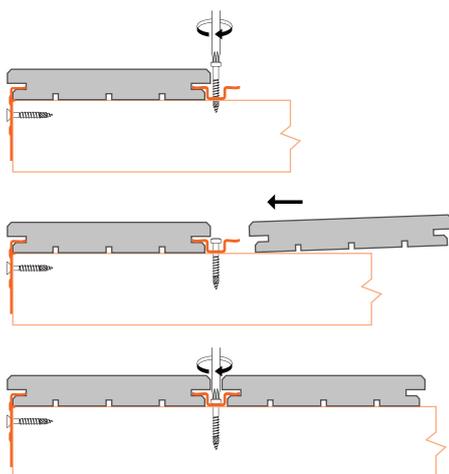B-Vis Black: A2 stainless steel + black coating
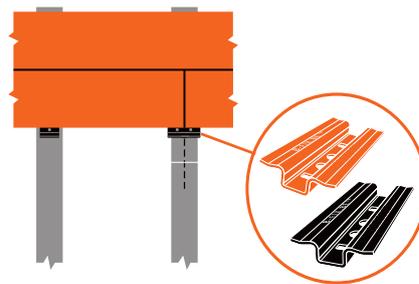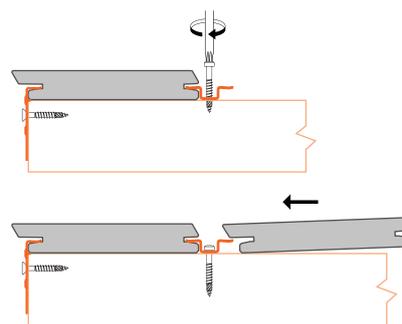
Tested wood

Ipe, Padouck, Afrormosia, Cumaru, Itauba, Tali, Limbali, Larch, Douglas, Bamboo, Teak, Jatoba, Merbau, Garapa, Massaranduba, thermo wood, composite, Accoya wood, Afrikulu, …

Assembly

B-Fix Classic

B-Fix Plus / Premium

Installation conditions
Humidity target

	Le Zoute	Brussels	Lille	Marseille
☀	22	22	22	17
	+	+	+	+
❄	18	16	14	11
	2	2	2	2
	= 20%	= 19%	= 18%	= 14%

Distributed by:

B-Fix®

📞 +32 10 400 790
+33 1 747 13 834

🖨 +32 10 400 795
+33 1 747 13 835

✉ info@b-fix.be

📍 Drève des 4 Chênes, 1
1495 Villers-la-Ville
Belgium

🌐 www.b-fix.com